

## Anti-finger Jam Seal

Finger-pinch protection devices should be installed wherever doors are accessible to children in schools, kindergartens and children day care centres. Finger-pinch injuries in doors are a significant cause of injury and claims against liability insurance in child care situations. RP62 helps prevent fingers being jammed on the hinge side of a door. It is recommended RP62 be installed to the full height of the door/jamb for maximum protection. This will reduce tampering and accidental deposit of toys or waste material behind the anti-finger jam seal. RP62 can be retrofitted to butt hinged or centre pivot doors and conform to the UK Workplace (Health, Safety and Welfare) Regulations 1992 Statutory Instrument 1992 No. 3004 clause 18. The RP62BW is reversible for either a brown or white finish.

### RP62



A safety strip which prevents fingers being jammed on the hinge side of a door. It is fixed to the door and the jamb on the hinged side.

*Note: It is recommended to fit RP62 to the full height of the door/jamb for maximum protection. For longer lengths, butt join together.*

**Location:** Door and jamb of 0-180 degree opening butt hinged or centre pivot doors.

**Finish:** Satin clear (silver) anodised aluminium (15µm).


**Fixing:** Screw fix. Zinc plated, cross recess head S.T. screws and cover strip supplied. Fixing holes are pre-slotted.

**Seal:** RP362. Black EPDM rubber.

**Sizes:** 2100mm.

#### Approvals

**Durability** Tested to BS 8613:2017 Class 1 Finger protection devices for pedestrian doors.

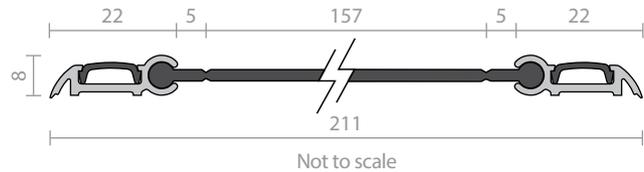

### RP62BW



A safety strip which prevents fingers being jammed on the hinge side of a door. It is fixed to the door and the jamb on the hinged side.

*Note: It is recommended to fit RP62BW to the full height of the door/jamb for maximum protection. For longer lengths, butt join together.*

RP62BW is reversible for a brown or white finish.

**Location:** Door and jamb of 0-180 degree opening butt hinged or centre pivot doors.

**Finish:** Satin clear (silver) anodised aluminium (15µm).

**Fixing:** Screw fix. Zinc plated, cross recess head S.T. screws and cover strip supplied. Fixing holes are pre-slotted.

**Seal:** RP462BW. Reversible flexible brown/white PVC rubber. Brown and white flexible PVC cover strips included.

**Sizes:** 2500mm, 2100mm.

#### Approvals

**Durability** Tested to BS 8613:2017 Class 1 Finger protection devices for pedestrian doors.

